



TRE3M XX-40

Nameplate




*Custom OEM Nameplate Design
Available Upon Request


Max. Flow Rate
2.5 m³/h

Max. Head
4m

Performance Curve

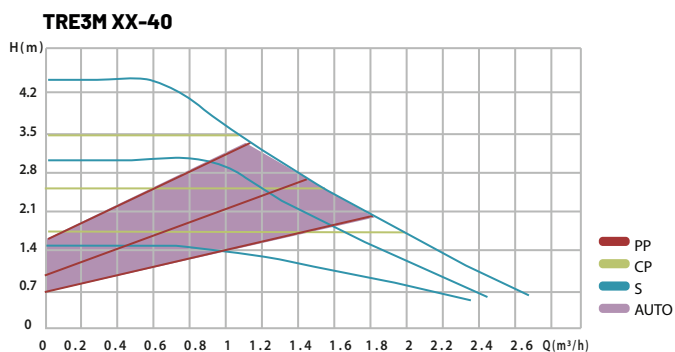

Dimension

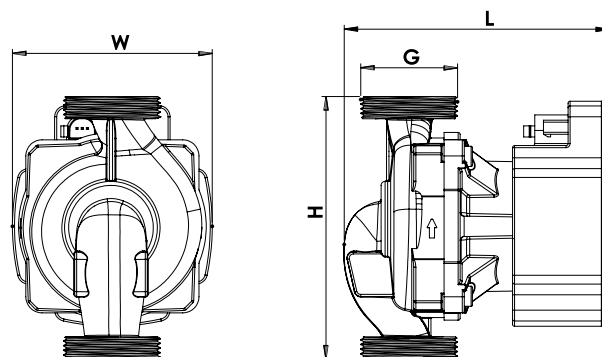

W 99 mm

L 130 mm

H 130mm

G 1 1/2"

EEI ≤ 0.20

iPWM



Model Information

Model	Min/Max Temp (°C)	L (mm) H2	DN G	P1 Max	Voltage (V)	Rated Current (A)	Union
15-40-130	+2 to +95	130	15mm G1	40W	1x230	0,37	G1 to G3/4
25-40-130	+2 to +95	130	25mm G1½				G1½ to G1



TRE3M XX-60

Nameplate




*Custom OEM Nameplate Design
Available Upon Request


Max. Flow Rate
3.2 m³/h

Max. Head
6m

Performance Curve

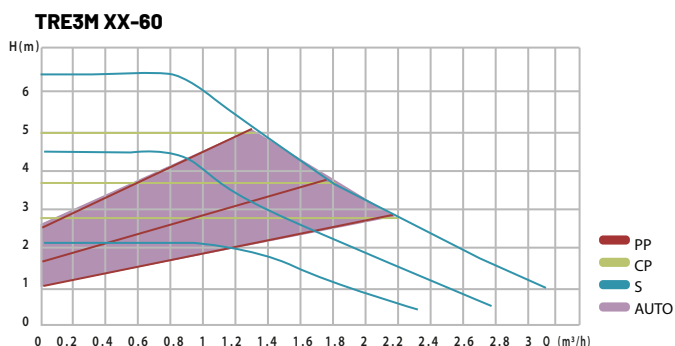

Dimension

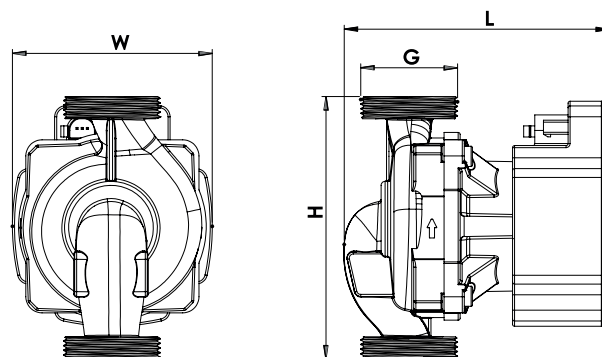

W 99 mm

L 130 mm

H 130mm

G 1 1/2"

EEI ≤ 0.20

iPWM



Model Information

Model	Min/Max Temp (°C)	L (mm) H ₂	DN G	P1 Max	Voltage (V)	Rated Current (A)	Union
15-60-130	+2 to +95	130	15mm G1	50W	1x230	0,45	G1 to G3/4
25-60-130	+2 to +95	130	25mm G1½				G1½ to G1
25-60-180	+2 to +95	180	25mm G1½				G1½ to G1
32-60-180	+2 to +95	180	32mm G2				G2 to G1¼



TRE3M XX-80

Nameplate




*Custom OEM Nameplate Design
Available Upon Request


Max. Flow Rate
3.5 m³/h

Max. Head
8m

Performance Curve

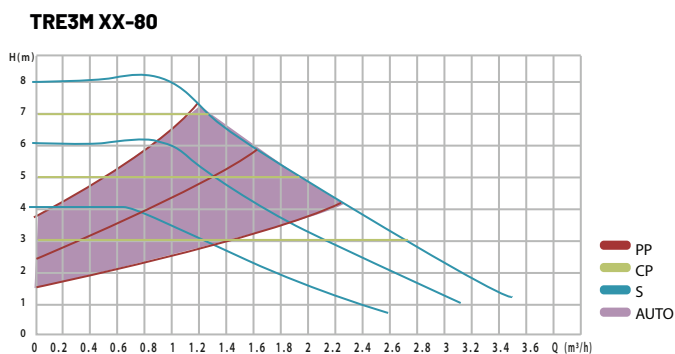

Dimension

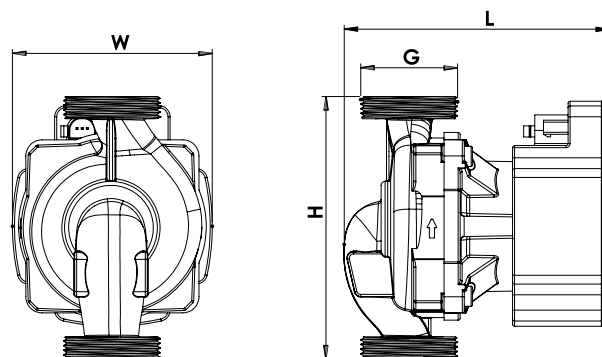

W 99 mm

L 130 mm

H 130mm

G 1 1/2"

EEI ≤ 0.20

iPWM

ErP
READY

CE RoHS
Compliant

Model Information

Model	Min/Max Temp (°C)	L (mm) H ₂	DN G	P1 Max	Voltage (V)	Rated Current (A)	Union
15-80-130	+2 to +95	130	15mm G1	60W	1x230	0,45	G1 to G3/4
25-80-130	+2 to +95	130	25mm G1½				G1½ to G1
25-80-180	+2 to +95	180	25mm G1½				G1½ to G1
32-80-180	+2 to +95	180	32mm G2				G2 to G1¼

PWM Mode

Pump driver board have been working in a two control modes that PWM and gear mode. In PWM mode pump speed change as a function of PWM input profile. When there is no PWM signal, pump driver board have been working in a gear mode. In gear mode, pump runs in five different speed. On the other hand pump driver board has a five LEDs for give information about operation status and error conditions.

Pump driver board has a two PWM signal that input PWM signal and output PWM. Input PWM signal works in 1 - 4 kHz range and changes the pump speed. Output PWM signal work as a feedback signal and it is fixed at 75 Hz. Output PWM give a information about the pump output power.

Optocoupler Isolation	AVAILABLE
PWM Output Frequency	75 Hz
PWM Input Frequency	1 - 4 kHz
Input voltage high level U_{IH}	4.0 - 24V
Input voltage low level U_{IL}	< 1V
High level input current I_H	3.5 mA - 10 mA
PWM adjustable range	0 - 100 %
Signal polarity	Fixed
Signal line length	< 3m
Rise and fall time	< T/1000

Table 2. PWM signal characteristics

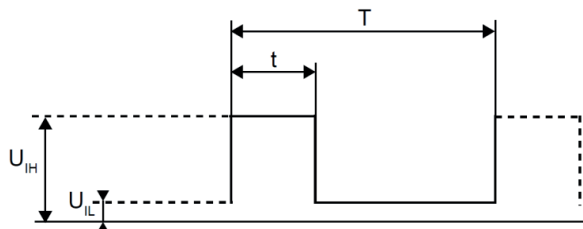



Figure 3. PWM signal characteristics waveform

PWM Interface

The PWM interface consists of an electronic part that connects the external control signal in isolation to the microcontroller of the pump driver board. In addition, the interface allows the user to avoid contact with hazardous voltage if the signal touches the wires when power is connected to the pump.

Position	Description
1	Galvanic Isolation
2	PWM Output
3	ISO GND
4	PWM Input

Table 3. Interface schematic description

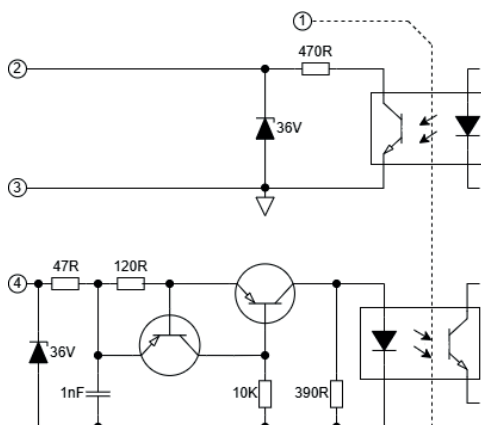

PWM Input Signal Profile

PWM mode operating principle is given in the picture below. In PWM Mode, the pump can be driven at different speeds. When the PWM signal duty cycle value is low, circulating pump rotate high speed because if the PWM connection is damaged the circulating pump must be run at maximum speed to transfer heat from primary heat exchanger. With the help of hysteresis, the pump can be prevented from switching off and on continuously at low speeds.

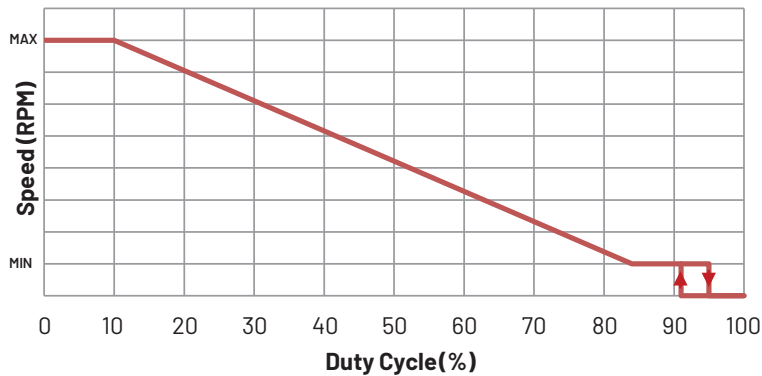


Figure 5. Input PWM waveform

Input PWM Duty Cycle (%)	Pump Driver Board Status
0	There is no PWM signal send to the pump driver board. So in this status pump driver have been work on a gear mode.
0 < Duty ≤ 10	Pump runs in maximum speed.
10 < PWM ≤ 84	Pump speed is linearly drops from the maximum speed to minimum speed.
84 < PWM ≤ 91	Pump runs in minimum speed.
91 < PWM < 95	In this range, hysteresis is used to stop the pump above 95 and drive it at minimum speed when it falls below 91 .
95 ≤ PWM ≤ 100	Pump stops running, Standby

Table 4. Input PWM description

PWM Output Signal Profile

The PWM output signal offers information below that about pump driver board.

- Current power consumption
- Warning
- Alarm
- Operating status

Position	Value	Description
X Axis	-	Output power consumption (W)
Y Axis	-	PWM output signal percentage (%)
A	%95	Standby, Pump stop
B	%90	Alarm Stop : Blocked pump
C	%85	Alarm Stop : Electric fault
D	%75	Warning
E	%0-%70	Slope: 1% / watt PWM signal
F	%70	Saturation at 70 W

Table 5. Output PWM description

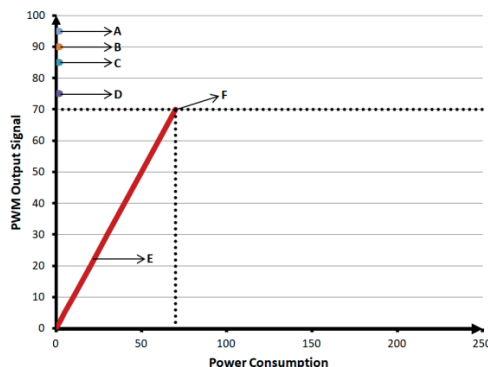


Figure 6. Output PWM Waveform

Gear Mode

Gear mode is activated if there is no PWM signal. The gear mode operates the pump via the external button with five different output powers as given in the table below.

Gear Mode	Output Power	Output Current
1	35W	0.33A
2	40W	0.37A
3	50W	0.45A
4	55W	0.50A
5	60W	0.55A

Table 6. Gear mode output power and current description

Protective Functions

Function name	Function Description	FAILURE TYPE
Electronic unlock	When the shaft is stuck , the electric pump will start with normal torque first. If it cannot start, it will start twice at 1.2 times the maximum torque. If it cannot start again, it will start twice at 1.5 times the maximum torque. If it cannot start smoothly, Stop and report the pump blockage fault from the PWM feedback line. After 10 minutes, try to start again.	Failure error
Oversvoltage / Undersvoltage protection	In abnormal conditions, when the input voltage is less than 160V or a voltage higher than 270V, the motor will enter the protection state and report an electrical fault to avoid over-range use and cause damage, the voltage is restored, and the electric pump resumes operation.	Failure error
Overcurrent protection	When the electric pump is short -circuited fault occur, the electric pump reports an electrical fault and needs to be powered off and restarted	Lockout error
Phase protection	When the electric pump lacks and equal fault occurs, the electric pump reports an electrical fault and needs to power off and restart.	Lockout error

Table 7. Protective functions


The pump driver board consists of five different LEDs. These LEDs provide information about operating mode, error conditions . The table below shows the status of the LEDs according to their lighting combination. Also all LEDs blinking three times each time the pump driver board is initialized. In addition, if there are no error or mode changes, the LEDs go out after one minute.

Status	LEDs Combination
Gear Mode 1	●●●●●
Gear Mode 2	●●●●●
Gear Mode 3	●●●●●
Gear Mode 4	●●●●●
Gear Mode 5	●●●●●
PWM Mode	●●●●●
Blocking Protection	●●●●●
Phase Protection	●●●●●
Over Current Protection	●●●●●
Oversvoltage / Undersvoltage Protection	●●●●●

Table 8. LEDs status descriptions



Cable Connections

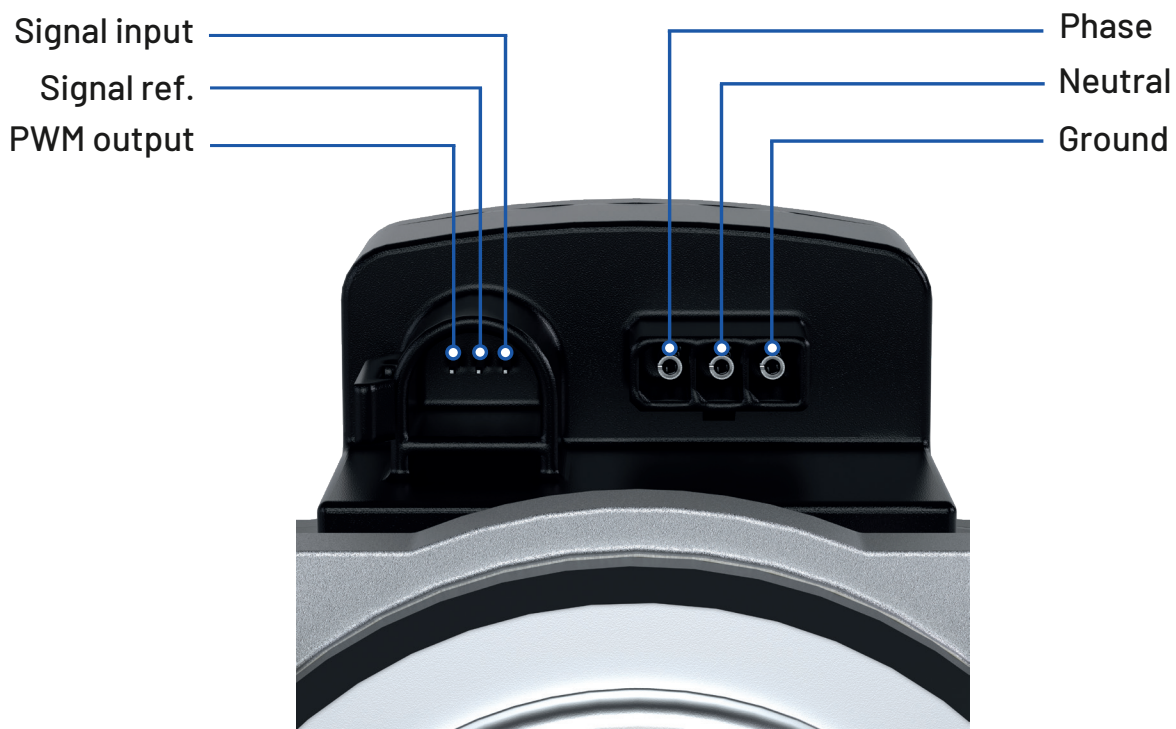


Pwm Cable



FCI

Power Cable



MOLEX 15311032